


V3UFMC01P7 AMD UltraScale FMC+ Carrier

Rugged mid-range FPGA processing for cost sensitive defence, aerospace and industrial programs

- 3U VPX FPGA FMC Carrier aligned with the SOSA Technical Standard
- AMD® UltraScale™ or UltraScale+™ FPGA processor
- Wide range of OpenVPX slot profiles
- Data & expansion planes for high-speed protocols
- SOSA aligned, P2B VITA67.3D profile
 - *LightCONEX*® 4TRX Optical Module on-board
 - Up to 10 NanoRF from FMC
- Up to 8GB DDR4 ECC memory
- VITA 57.1 FMC mezzanine site for I/O module
- Air or conduction cooled
- Designed and made in the Netherlands
- Long-term Availability and Security Assured

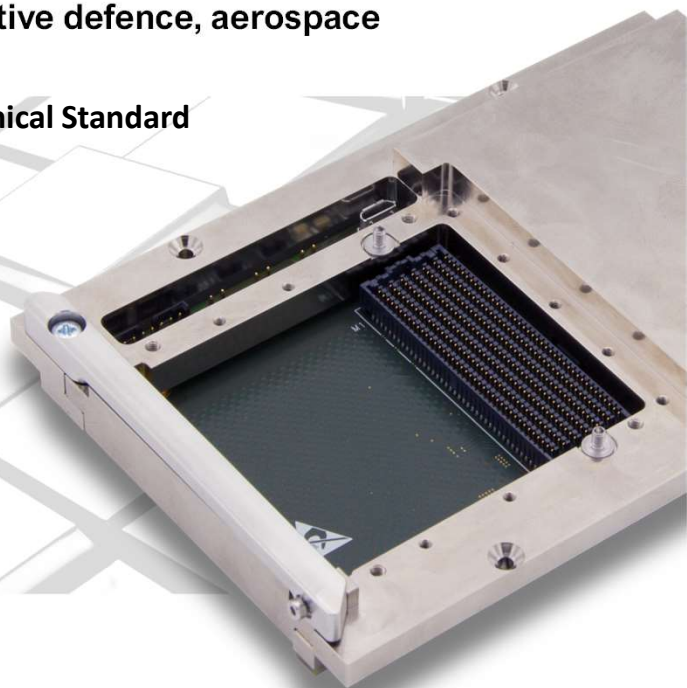


DESCRIPTION

The 3U VPX V3UFMC01P7 is a member of Hybrid DSP's XU01P 1156 Core Series of mid-range, cost effective, rugged processing boards based on the AMD Kintex UltraScale A1156 FPGA package, up to 8GB DDR4 and an ARM-based Board Management Controller (BMC).

The V3UFMC01P7 is a SOSA aligned build option of the V3UFMC01P, providing a combined optical and coax interface in alignment with VITA 65.0 Payload Slot Profile SLT3-PAY-1F1U1S1S1U1U4F1J-14.6.13-4. The optical interface consists of 4 TX and 4 RX fibres, offering 40Gbps of bandwidth in each direction. Up to 10 NanoRF coax cables can be routed to any type of VITA 57.1 FPGA Mezzanine Card.

In addition to numerous standard build options, the design is optimized for rapid customization of many key features including the front-panel, cooling solution, reference firmware, and BMC. Furthermore, the PCB layout and stack-up allows for a viable low-risk route for more complex technical and commercial requirements including modular-to-monolithic.

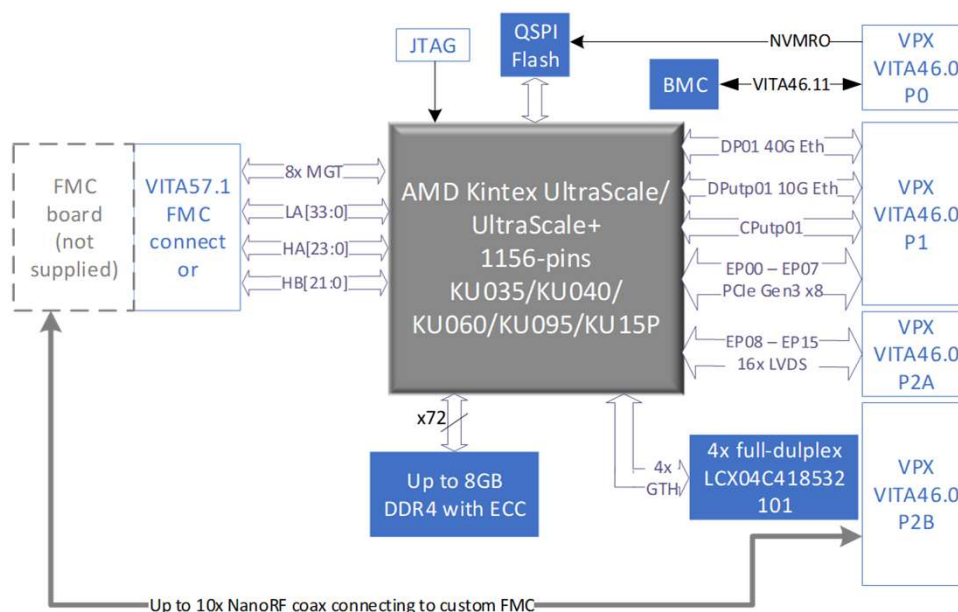

TECHNICAL SPECIFICATIONS

Main Processor and Memory

- AMD Kintex UltraScale(+)TM A1156 FPGA XCKU035, XCKU040, XCKU060, XCKU095, XQKU040, XQKU060, XQKU095, KU15P
- DDR4 4GB or 8GB with ECC

Board Management

- Voltage and temperature monitor
- Power/reset control
- Tier-3 VITA 46.11 IPMI

Backplane Architecture (3U)

- Up to 16 serial transceiver lanes on VPX P1 (PCIe Gen3, Aurora, Ethernet, RapidIO etc)
- 16 LVDS on VPX P2A (can be disconnected)
- 4 TRX 10.3125Gbps optics on VPX P2B
- 10 NanoRF to FMC on VPX P2B

Front Panel I/O

- FMC+ site per VITA 57.1
- Extended component free region

Mechanical

- 3U VPX COTS and Custom air- and conduction-cooled (FMC+) compatible heat-frame
- OpenVPX and VPX-REDI
- Pitch: 1"

Board Support Package

- Vivado project, VHDL based reference designs, UART and PCIe drivers, API, Python and C/C++ sample applications

Compliance

- OpenVPX System Specification encompasses VITA 46.0, 46.3, 46.4, 46.6, 46.7, 46.9, 46.11
- Compatible with VITA 65 and SOSA aligned systems
- VITA 47.0
- VITA 48.0/48.1/48.2 (REDI)
- VITA 57.1

VITA 47.0 Construction, Safety and Quality

- Environmental Class: EAC1, EAC6, ECC1 and ECC3 (-40°C to +70°C operating temperature range)
- IPC-A-610D Class 3 and IPC-A-600G Class 3
- Conformal Coating: IPC-CC-830B

RELATED PRODUCTS

V3UADC01P Series*



- 3U VPX Monolithic ADC
- Based on **V3UFMC01P** Design
- 8-channel 250Msps ADC
- Internal and external clock



SUPPORT AND VARIANTS

Hybrid DSP Systems supports her customers in the specification, design, production, integration and long-term product and life-cycle management of high-end rugged COTS and Modified-COTS 3U/6U VPX payload and I/O boards for VPX and OpenVPX based systems as well as those aligned with the SOSA Technical Standard.


Security of design and supply chain is increasingly important: the boards, firmware and software are designed and produced in the Netherlands. The Board Management Controller with VITA 46.11 IPMI is an in-house source available implementation.

The processes and IP used to design, produce and support her range of COTS products are fully modular and can be licensed on a flexible basis. Backed by discrete professional support and delivered and regularly updated in a transparent, traceable manner via private git repositories, the IP includes everything from complete board designs to source code and from mechanical files to documentation.

Contact Hybrid DSP to discuss how we can accelerate your next development.

V6UFMC01P Series*

- 6U VPX Dual FMC carrier
- Dual **V3UFMC01P** Design
- Dual VITA 57.4 FMC+ Site

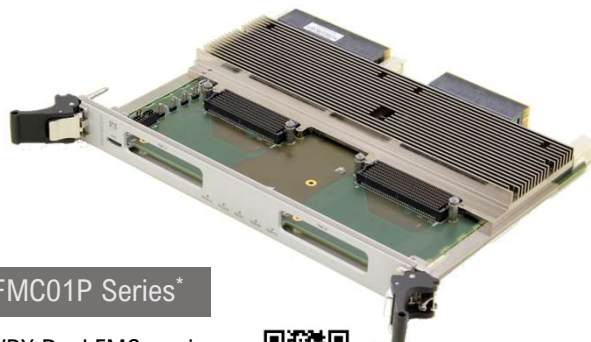

V3UFT101P Series*

- 3U VPX 5.4Gsps AD/DA
- Based on **V3UFMC01P**
- Kintex UltraScale+ FPGA



V3UFMC51P Series*

- 3U VPX FMC Carrier
- High-end Series
- Virtex UltraScale+ 2104
- Roadmap Product



1. SOSA and logo design and The Open Group Certification MarkTM are trademarks of The Open Group in the United States and other countries.
 2. The VPX logo and related marks are trademarks of VITA
 3. Hybrid DSP is a preferred FPGA partner to Mercury Systems
 4. LightCONEX is a registered trademark of REFLEXPHOTONICS
 * Products and solutions were developed in alignment with the SOSATM Technical Standard